



## MAILBOXES ▲



## CUSTOM SIGNAGE ▼

## ▲ STREET SIGNS



## MULTI-BOX SYSTEMS

**IMPERIAL**  
IMI MAILBOX SYSTEMS

# IMPERIAL IMI MAILBOX SYSTEMS

STREET SIGNS

SIGN BACKPLATES

CUSTOM SIGNAGE

LAMP POSTS

## *Street Sign* CATALOG



• 1-866-707-0008 •

[www.budgetmailboxes.com](http://www.budgetmailboxes.com)



# IMPERIAL IMI MAILBOX SYSTEMS

*Premiered in the Finest Master-Planned Communities*

U.S.P.S. and D.O.T. Approved | Members of NAHB and NGF



## TABLE OF CONTENTS

About Imperial Mailbox Systems .....	pg. 1
Terms and Conditions .....	pg. 2
Imperial Standard/Custom Colors Pole Sections .....	pg. 3
Imperial Pole Cross-Sections .....	pg. 3
“A Series” Sign Systems .....	pg. 4
“A Series” Sign Systems Component Sheet .....	pg. 5
“B Series” Sign Systems Component Sheet .....	pg. 6
“Estate Series” Sign Poles Component Sheet .....	pg. 7
Imperial Sign Systems Back Plates .....	pg. 8
Imperial Sign Systems Sign Faces .....	pg. 9
Landmark Frame System and Raised Letter Blades .....	pg. 10
Landmark Logo Frame .....	pg. 11
Sample Configurations of Street Sign Systems .....	pg. 12
Decorative Light Poles .....	pg. 13
Sample Configurations of Light Poles .....	pg. 14
Light Pole Fixture .....	pg. 15
Decorative Bollards .....	pg. 16
D.O.T. Letter .....	pg. 17
Standardize Your Development with Imperial .....	pg. 18





**Curb Appeal.** These two words are often repeated during the planning stages of a residential development. Guidelines and restrictions are placed on homebuilders and owners to ensure the quality and aesthetic value of each home constructed. The shutters, trim, doors, even the lawns of each home have carefully outlined procedures to protect the value and pattern of the development. Imperial Mailbox Systems continues this careful attention to detail in this beautification and standardization process by providing the highest quality **U.S.P.S. Approved** mailboxes and **D.O.T. Approved** street signage.

As members of several national housing organizations, such as the **National Association of Home Builders**, **National Golf Foundation**, and the **Community Associations Institute**, Imperial Mailbox Systems has provided planned developments and communities across the United States with quality cast-aluminum mailboxes, street signage, and patio light poles. Our selection, illustrated in this catalog, is designed to complement and standardize all of your curbside and traffic sign needs.

It is our mission to serve you by providing U.S.P.S. approved mailboxes, and matching D.O.T. approved street signs. Leading the industry, Imperial has proven itself through partnerships with both organizations, and have a proven ISO 9001:2000 compliant system to continue to improve our products, services, and customer satisfaction.

Contact our customer service department today at **1-866-707-0008** or visit our website online at **www.budgetmailboxes.com, for more** information about how Imperial products are right for your project, or to find more information about U.S. Postal or D.O.T. standards and requirements. Give yourself the opportunity to realize the added value of your development's curb appeal with mailboxes, street signs, and light poles from Imperial!





# TERMS AND CONDITIONS

## IMPERIAL IMI MAILBOX SYSTEMS

*Call one of our Customer Service Representatives today, and see how we can provide your community the finest quality cast-aluminum "rust free" mailboxes, street signs, and light poles.*

**OFFICE HOURS**  
Monday thru Friday  
7:30 AM - 4:30 PM CST

**1-866-707-008**  
[www.budgetmailboxes.com](http://www.budgetmailboxes.com)



**DEALERS  
NATIONWIDE**



## TERMS AND CONDITIONS

**SHIPPING TERMS:** All prices are F.O.B. point of origin. Freight charges must be prepaid at time of order placement. Freight collect requires prior approval.

**DELIVERY:** Most items in this catalog are stocked and ready to be shipped within (5) business days. Custom and large orders may vary in shipping times (between 2-8 weeks, please call for a quote), and may be drop shipped to various locations. Specific shipping dates are not guaranteed. Most items ship via FED-EX ground or FED-EX Freight. Before accepting any shipment, the extent of any damages or shortages should be noted in writing on the bill of lading before you sign for the shipment. Claims are the responsibility of the shipper.

**MATERIALS:** All descriptions and specifications contained in this catalog were in effect at the time of publication. Imperial Mailbox Systems reserves the right to change specifications and/or designs without notice or incurring liability.

**INSTALLATION:** Most products require minor assembly. Consult local postal or D.O.T. authorities regarding any local requirements.

**QUOTATIONS:** Individual quotations are valid for (30) days. Imperial Mailbox Systems reserves the right to alter a quote at any time and for any reason, as well as the right to decline an order for any reason.

**DEALERS:** Imperial Mailbox Systems primarily sells through our dealers. Call 800-647-0777 to find the nearest dealer in your area. Dealers are not employed by Imperial Mailbox Systems.

**RETURNS:** Returned products will not be accepted without prior authorization from Imperial Mailbox Systems, and must be shipped prepaid to Imperial Mailbox Systems. All returns are subject to a 25% restocking fee. Items must be inspected and reported of any nonconforming issue within (7) business days. Shipping charges are non-refundable.

**COPYRIGHT:** All catalogue products, graphics, and text are © 2020 Imperial Mailbox Systems. ALL RIGHTS RESERVED.

**WARRANTY:** Imperial Mailbox Systems provides a (1) year limited warranty to the original purchaser covering defects in material and workmanship if reported in writing to Imperial Mailbox Systems within (1) year of the delivery date. Whether a condition is a defect is determined solely by Imperial Mailbox Systems. This warranty is limited to the cost of the products, and does not include installation fees, transportation neglect or costs, vandalism, misuse, or alterations by the customer. It is the option of Imperial to replace or repair defective products. Imperfections in sand cast products are a part of the natural aesthetics and not considered a defect. Wear and tear is not covered. Purchaser assumes all liability and risk upon purchase of goods.



# STANDARD COLORS



BLACK



BRONZE



GREEN



WHITE

# IMPERIAL POLE CROSS SECTIONS

3-inch OD  
Round Fluted Pole




3-inch OD  
Round Pole



2 3/8-inch OD  
Round Pole



4-inch  
Square Pole

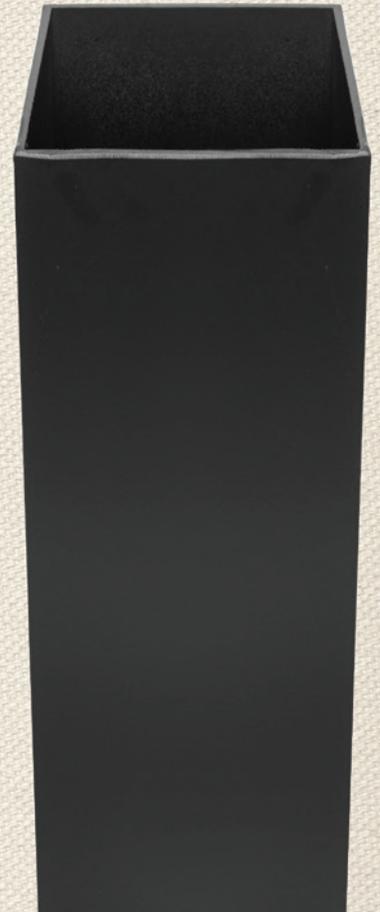

## SYSTEM CODE SPECIFICATIONS




SIGN POLE

BASE

BACK PLATE  
*(If NO Back Plate,  
Value is 0)*

FINIAL

For Optional  
**FLUTED POLE**  
*(only for A-Series poles)*

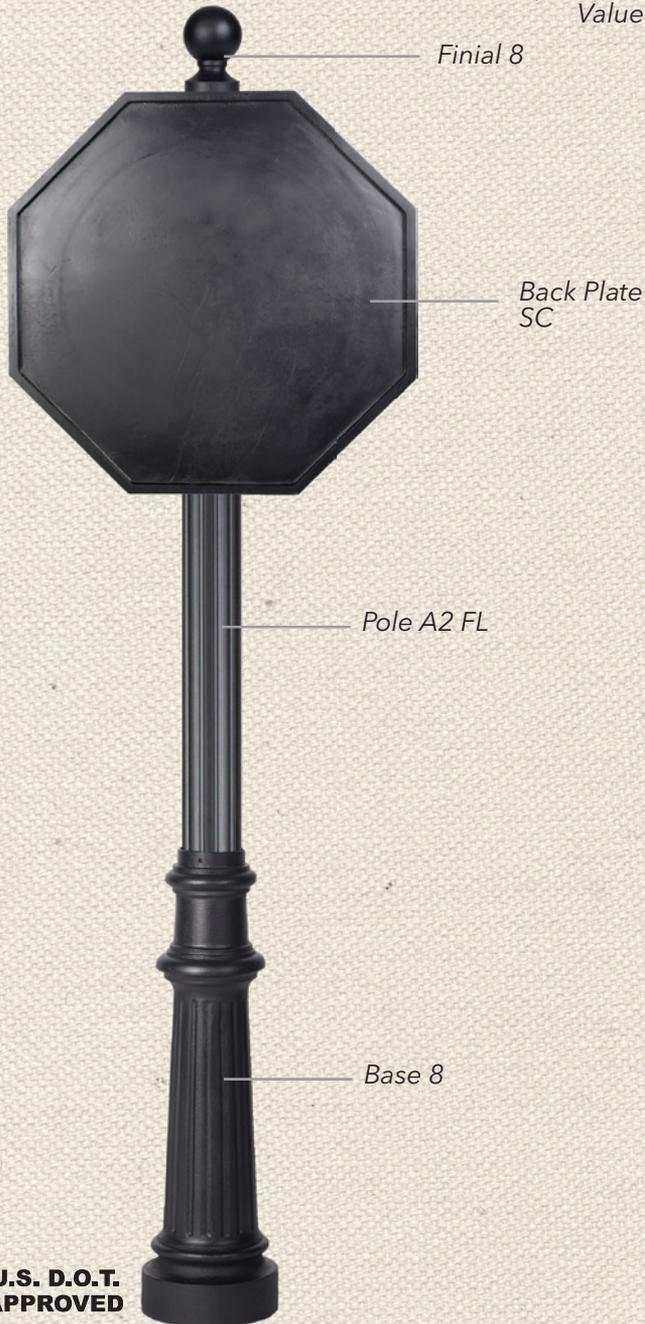

### SPECIFICATIONS

- D.O.T. Standard and Custom Sign Faces and Street Name Signs Available.
- All Sign Systems utilize an extruded aluminum pole meeting ASTM Standards. Century Poles have a wall thickness of .0125", Imperial Poles are Schedule 80, Estate Poles have a wall thickness of .125".
- All Systems are designed for Direct Ground Burial.
- All Street Signs are finished using a Premium Enamel Paint ensuring a continuity of service.



Imperial's standard pole lengths are designed to meet the industry standard height-to-grade requirements of seven feet.

**CUSTOM POLE LENGTHS are Available**

*Contact a Sales Representative for a Quote.*



A1 A1 FL A2 A2 FL A3 A3 FL

3" Outside Diameter

**POLE LENGTH 1 = 14' 6"**  
**POLE LENGTH 2 = 12'**  
**POLE LENGTH 3 = 11'**



BASES



FINIALS



# B-SERIES IMPERIAL SIGN POLES

Refer to **HOW TO ORDER SIGN SYSTEMS** on page 04

Imperial 's standard pole lengths are designed to meet the industry standard height-to-grade requirements of seven feet.

**CUSTOM POLE LENGTHS** are Available

Contact a Sales Representative for a Quote.



**B1**

**B2**

**B3**

2 3/8" Outside Diameter

**POLE LENGTH 1 = 14' 6"**

**POLE LENGTH 2 = 12'**

**POLE LENGTH 3 = 11'**



**2**



**3**



**5**



**6**

## BASES



**1**



**2**



**3**



**4**



**5**



**6**



**H**

## FINIALS



Refer to **HOW TO ORDER SIGN SYSTEMS** on page 04

Imperial's standard pole lengths are designed to meet the industry standard height-to-grade requirements of seven feet.

**CUSTOM POLE LENGTHS are Available**

Contact a Sales Representative for a Quote.



4" Square  
**POLE LENGTH 1 = 14' 6"**  
**POLE LENGTH 2 = 12'**  
**POLE LENGTH 3 = 11'**



Base 6  
SQ



Finial  
6 SQ



**NEW!**

Finial  
7 SQ

Square Base and Finial Style featured below are available for Estate Sign Systems.



# SIGN BACK PLATES

Imperial's solid cast back plates are designed to accommodate Department of Transportation standard stop, yield and information signs.



CODE	SIZE
YA	30"
YB	36"



CODE	SIZE
SC	30"
SB	24"
SA	18"



CODE	SIZE
DC	30"
DB	24"
DA	18"




CODE	SIZE
IC	24" x 30"
IB	18" x 24"
IA	12" x 18"



CODE	SIZE
QC	30" x 30"
QB	24" x 24"
QA	18" x 18"



CODE	SIZE
IF	36" x 12"



CODE	SIZE
IG	12" x 6"

**CUSTOM BACKPLATE SIZES are Available**

— Contact a Sales Representative for a Quote. —

# IMPERIAL SIGN FACES

Sign Faces are available in Engineer Grade Prismatic, High Intensity Prismatic, and Diamond Grade Prismatic. All standard sign faces are MUTCD approved.



SF YIELD 30"  
SF YIELD 36"



SF STOP 30"  
SF STOP 24"  
SF STOP 18"



SF DIAMOND 30"  
SF DIAMOND 24"  
SF DIAMOND 18"



SF SPEED 24" x 30"  
SF SPEED 18" x 24"  
SF SPEED 12" x 18"



SF SQUARE 30" x 30"  
SF SQUARE 24" x 24"  
SF SQUARE 18" x 18"



SF ONE WAY 36" x 12"




SF 4-WAY 12" x 6"

**CUSTOM IMPERIAL SIGN FACES are Available**

Contact a Sales Representative for a Quote

These exclusive designs add style and strength to any standard street name sign.

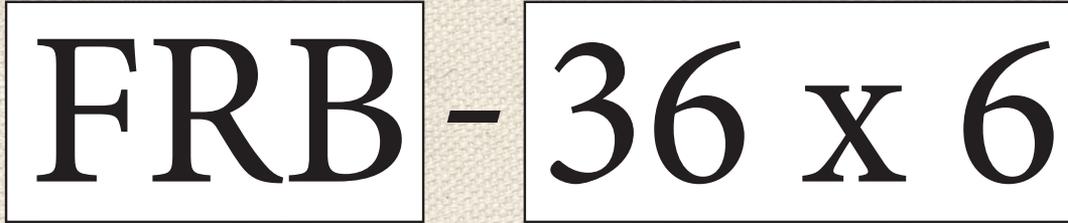

FRB designates Landmark Frame  
 FRH designates Hanging Landmark Frame  
 RLB designates Raised Letter Blade

Length & Height of FRB, FRH or RLB

- All Frames are designed to accommodate standard Department of Transportation street name signs. Check with your local municipality for your areas regulations.
- Frame Lengths are 24", 30", 36", and 42"  
Frame Heights are 6" and 9"  
 Custom Sizes are available
- Raised Letter Blades are die cast for an elegant touch of class. Frames are constructed of extruded aluminum.
- Raised Letter Blade Lengths are 30" and 36"  
Raised Letter Blade Heights are 6" only



For additional appeal, add a decorative scroll to your Landmark Frame or Raised Letter Blade.


Raised Letter Blade with Scroll attached

Landmark Frame with Scroll attached


Hanging Frame with Scroll Arm



## 9X9 LOGO FRAME

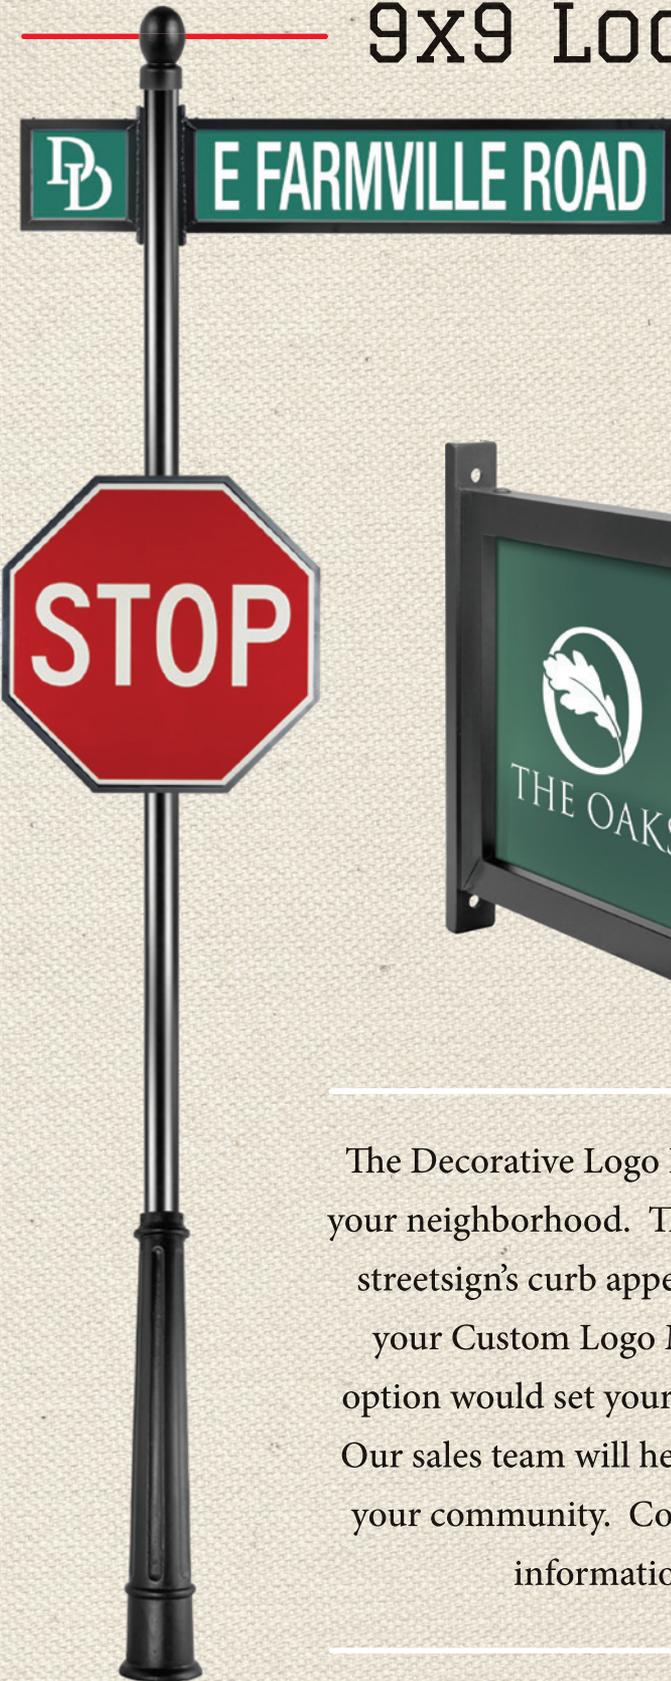

**Set your neighborhood apart from the rest by adding a Custom Logo Frame to your Street Sign!**

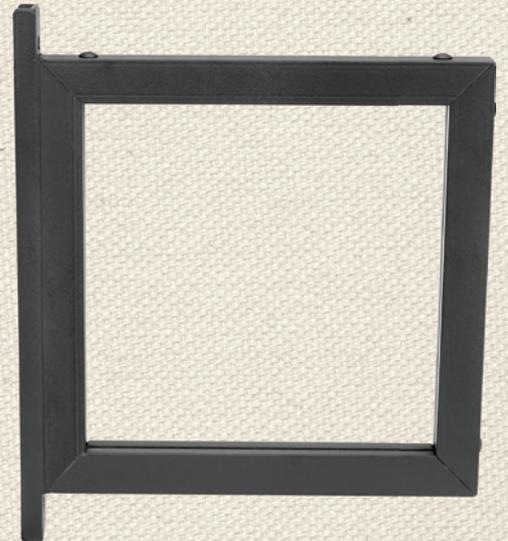

The Decorative Logo Frame features the signature community logo of your neighborhood. This custom frame will enhance the beauty of your streetsign's curb appeal. The Decorative Logo Frame can also match your Custom Logo Mailbox within your community. This custom option would set your community apart and add that signature touch! Our sales team will help you select and finalize your signature logo for your community. Contact an Imperial Sales Representative for more information about our Decorative Logo Frame.



**B3-3IB3**



**B3-6YA4**




**A3-8SB8**



**A2-7YA7**



**E1-6YA6**

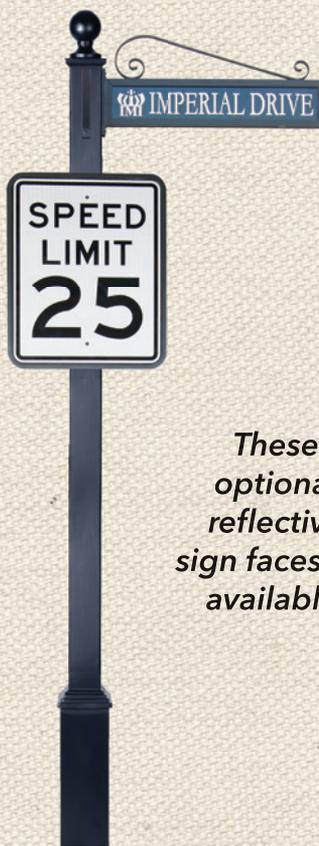

**E1-6IB6**

*These optional reflective sign faces are available.*



**A1-8SB8**




**E1-6SB6**

Imperial's line of decorative light poles are the perfect accent to any landscape. The poles are made for use with standard gas or electric lights available in your area.

## — SYSTEM CODE SPECIFICATIONS —


**System Rendering from Code Specified at right:**

*Light Fixture shown sold separately (see pg. 15)*

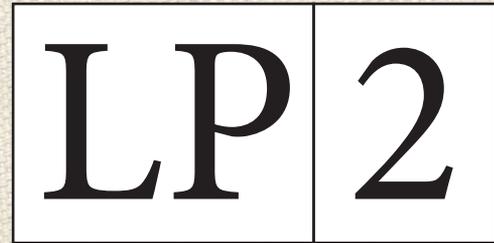

DESIGNATES  
LIGHT POLE

BASE  
*(Styles found on page 14)*

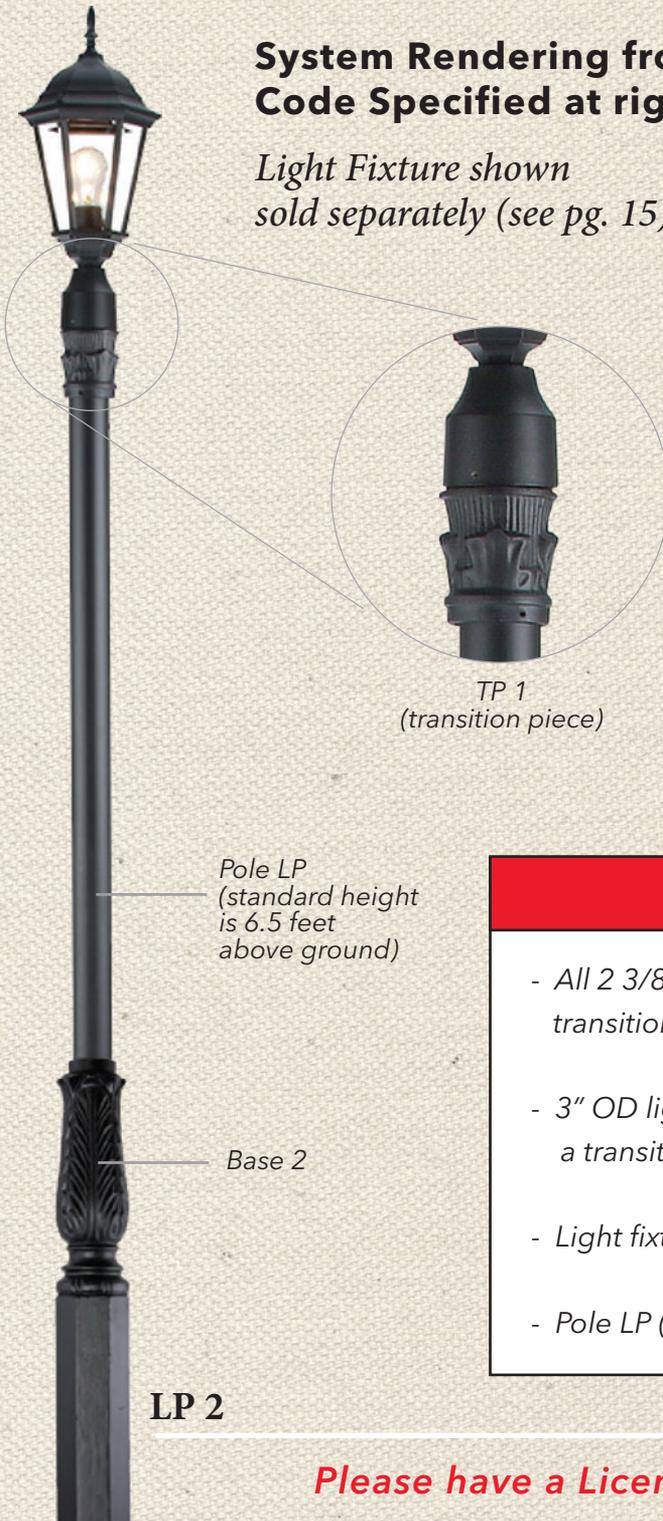


TP 1  
(transition piece)

Pole LP  
(standard height is 6.5 feet above ground)

Base 2

LP 2

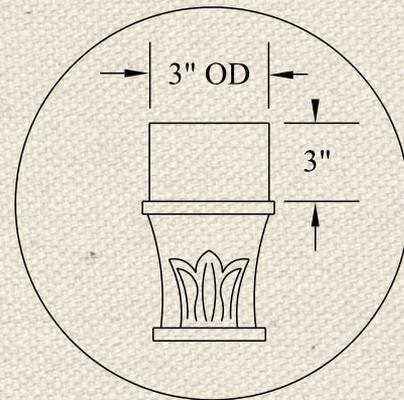

### SPECIFICATIONS

- All 2 3/8" OD light poles are equipped with a decorative transition piece (TP 1) to accommodate a 3" light fixture.
- 3" OD light poles (used with base 7, 8, or 9) do not require a transition piece.
- Light fixtures shown are sold separately.
- Pole LP (standard height is 6.5 feet above ground)

*Please have a Licensed Electrician wire your light.*

# LIGHT POLE OPTIONS



*with access panel*

Access panel built into the base for quick and easy access to electrical wiring.

Ideal for maintenance and new installations.

## BASE 8 LP



Please have a LICENSED ELECTRICIAN wire your light.



## TL-1

This traditional light fixture features die-cast aluminum components. The framed panels of glass display a warm and inviting light. This light fixture is the perfect accent for your light pole.



Light Poles and Light Fixtures sold separately

### SPECIFICATIONS

- Die-cast aluminum components
- Finish is treated with UV guard
- Bulb Wattage: 100w
- Bulb size: A19
- Number of bulbs: 1
- Bulb base: Medium
- Glass or Shade color: Clear beveled
- Height: 22 inches
- Width: 9.5 inches

## — SYSTEM CODE SPECIFICATIONS —

**DB**

DECORATIVE BOLLARD

**AX**

POLE STYLE

**808**

BASE

FINIAL



**AX-707**



**AX-808**



**AX-909**



**EX-606**



Our Imperial Bollards feature a short aluminum vertical post that is ideal for multiple applications, from traffic control to parks and recreation. The Imperial Bollard can be used to create a visual deterrent to protect both pedestrians, equipment, vehicles and property. They are available in both pier-mount and direct burial options. Custom heights are available as well. Contact a sales representative for a quote or more information.



May 28, 1993

U.S. Department of Transportation  
Federal Highway Administration

Refer to: HNG-14/SS-35 (Revised)

Mr. John H. Clark Imperial, Inc.  
3901 Norris Drive Millbrook, Alabama 36054

Dear Mr. Clark:

Thank you for your May 4 letter to Mr. Thomas O. Willett requesting Federal Highway Administration's (FHWA) acceptance for your company's aluminum pipe breakaway sign support. You referenced our Geometric and Roadside Design Acceptance Letter SS-28 dated May 26, 1992, which reported on small sign support testing conducted in "weak" soil and sponsored by the Florida Department of Transportation (DOT). In that letter, we accepted as breakaway 89-mm (3-in) diameter, 6061-T6 alloy aluminum tubes of 4.75-mm (0.187-in) thickness when no more than one sign support was used within a 7-foot span. The posts pulled out of the ground partially or completely, allowing the vehicle to gradually come to a stop. The signpost that you wish to use has a diameter of 60-mm (2.375 in) and a wall thickness of 5.54-mm (0.218 in). The two signposts are compared in the table below:

Sign Post	Florida DOT	Imperial, Inc.
Diameter	89 mm (3.5 in)	60 mm (2.375 in)
Wall Thickness	4.75 mm (0.187 in)	5.54 mm (0.218 in)
Alloy	6061-T6	6063-T6
Tensile Strength	310 Mpa (45 ksi)	186 Mpa (27 ksi)
Yield Strength	275 Mpa (40 dsi)	145 Mpa (21 ksi)
Cross Section Area	1257 mm <sup>2</sup> (1.951 in <sup>2</sup> )	948 mm <sup>2</sup> (1.477 in <sup>2</sup> )

In addition to the Florida DOT sponsored testing to which you referred, earlier tests of 100-mm (4-in) diameter thin-walled aluminum tubes were conducted in "strong" soil. These posts, which were fitted with anti-twist hardware below the groundline, fractured upon impact. They were found to be crashworthy.

Because your company's proposed aluminum tube sign support is a smaller diameter and made of a weaker alloy than posts already found to be crashworthy in either strong soil or weak soil, we find the 60- mm diameter, 5.54-mm thick wall tube of 6063-T6 aluminum to be acceptable for use on Federal-aid highway projects when requested by a highway agency. It has also been determined (reference FHWA acceptance letter SS-15) that your 3-inch and 4-inch diameter posts, each with a wall thickness of 0.125 inches and constructed from aluminum alloy 6061-T6, are accepted by FHWA. We would recommend, however, that a soil plate or other sort of anti-rotation device be installed below ground. This would have dual benefits of preventing the signpost from rotating, and improving the breakaway performance, especially in weak soil.

Our acceptance is limited to the breakaway characteristics of the post and does not cover its structural features. Presumably, you will supply potential users with sufficient information on structural design and installation requirements to ensure proper performance. We anticipate that the States will require certification from Imperial, Inc., that the hardware furnished has essentially the same chemistry, mechanical properties, and geometry as the post in question, and that it will meet the FHWA change in velocity requirements.

Sincerely yours,

Lawrence A. Staron, Chief  
Federal-Aid and Design Division

Federal Highway Administration



THE BENEFIT OF IMPERIAL PRODUCTS

STANDARDIZE  
YOUR DEVELOPMENT

With IMPERIAL!



# IMPERIAL IMI MAILBOX SYSTEMS

